

Fig. 133

Standard Duty Beam Clamp

Size Range: 4" through 8"

Material: Carbon steel

Finish: Plain or Hot-Dip Galvanized with Zinc Plated Fasteners

Service: Clamp centers the load on beam to prevent distortion

Approvals: Complies with Federal Specification A-A-1192A (Type 21) WW-H-171-E (Type 21), ANSI/MSS SP-69 and MSS SP-58 (Type 21).



Fig. 133 UL Listed when used with $\frac{3}{8}$ " and $\frac{1}{2}$ " rod.

Components: Two half-clamps, pipe spacer and bolt with nut assembled.

Ordering: Figure number, width of flange, name and finish.

Note: Spacer is furnished for use with Fig. 290 weldless eye nuts.

Spacer may be removed for use with Fig 278 eye rods.

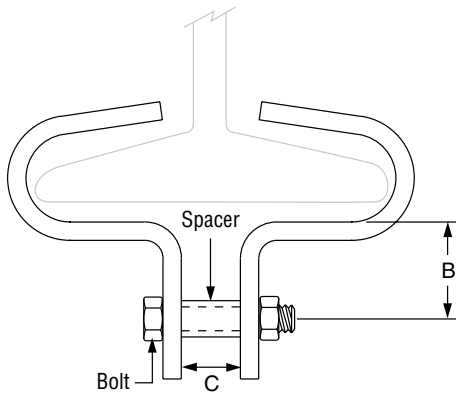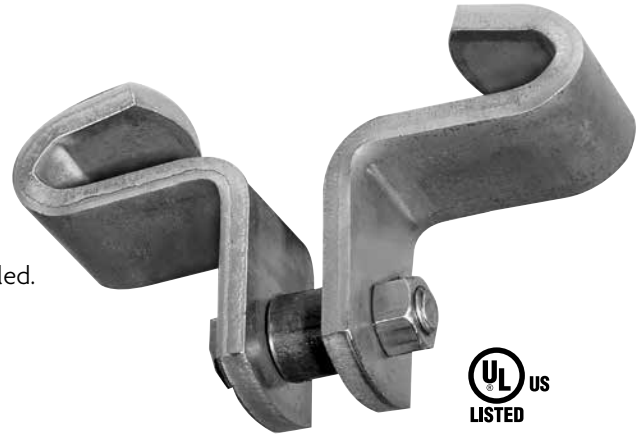

Flange Size		
Flange Width	Max Flange Thickness	Weight (lbs)
		Fig. 133 Std. Duty
4	$\frac{1}{2}$	0.91
5	$\frac{5}{8}$	1.00
6	$\frac{3}{4}$	1.15
7	$\frac{7}{8}$	1.29
8		1.44
9	1	—
10		—
11		—
12		—

FIG. 133: DIMENSIONS (IN) • LOADS (LBS)					
	C	B	Bolt Size	Spacer O.D.	Max Load
Fig. 133	$\frac{9}{16}$	$1\frac{3}{8}$	$\frac{3}{8}$	$1\frac{1}{16}$	1,000

PROJECT INFORMATION		APPROVAL STAMP	
Project:		<input type="checkbox"/> Approved	
Address:		<input type="checkbox"/> Approved as noted	
Contractor:		<input type="checkbox"/> Not approved	
Engineer:		Remarks:	
Submittal Date:			
Notes 1:			
Notes 2:			