

Regal® XL Flushometers 186-1 XL

Code Number

3082675

Description

Exposed Urinal Flushometer, for 3/4" top spud urinals.

- ► Flush Cycle
- □ 1.0 gpf/3.8 Lpf

Specifications

Quiet, Exposed, Diaphragm Type, Chrome Plated Urinal Flushometer with the following features:

- ADA Compliant Metal Oscillating Non-Hold-Open Handle
- Control Stop Plug
- Sweat Solder Adapter with Cover Tube
- Cast Wall Flange with Set Screw
- Vacuum Breaker Flush Connection
- Spud Coupling Wall and Spud Flange for 3/4" Top Spud
- Non-Hold-Open Handle and No External Volume Adjustment to Ensure Water Conservation
- Low Consumption flush accuracy controlled by Para-Flo™ Technology
- Diaphragm, Handle Packing and Vacuum Breaker Molded from PERMEX® Rubber Compound for Chloramine Resistance
- 3/4" I.P.S. Wheel Handle Bak-Chek® Angle Stop


Valve Body, Cover, Tailpiece and Control Stop shall be in conformance with ASTM Alloy Classification for Semi-Red Brass. Valve shall be in compliance with the applicable sections of ASSE 1037 and ANSI/ASME 112.19.2.

Accessories (Sold Separately)

See Accessories Section of the Sloan catalog for available accessories

► Fixtures

Consult factory for matching Sloan brand fixture options.

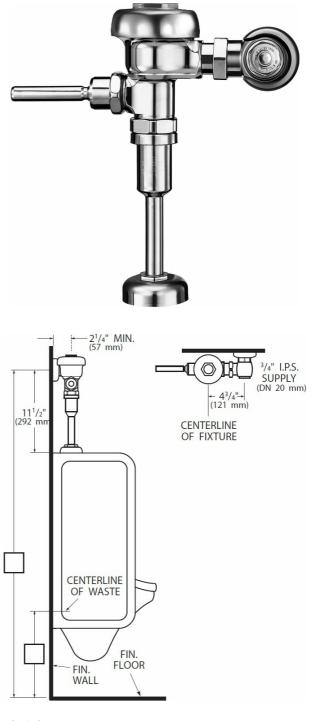

Disclaimer

All information contained within this document subject to change without notice.

► Compliance & Certifications Made In The USA

This space for Architect/Engineer Approval