

ElectriFLEX LD™ (Light Duty) Commercial Lowboy Electric Water Heater



Photo is of
LE120L3-3



Copper Screw Type Immersion Element
(INCOLOY® type immersion element available upon request)

Bradford White ElectriFLEX LD™ Lowboy Electric Models Feature:

- **Applications**—Lowboy models are ideal for installations where space is at a premium and are perfect for tight installations such as a closet or under a counter.
- **Fully Automatic Thermostat Controls**—Fast acting surface-mount thermostats with high limit energy cut-off (manual reset) for safety.
- **Direct Heat Transfer With Immersed Elements**—Transfers heat directly and efficiently to the water. Screw-in style.
- **Factory-Installed Hydrojet® Total Performance System**—Sediment reducing device that also increases first hour rating of hot water while minimizing temperature build-up in tank.
- **Vitraglas® Lining**—An exclusively engineered enamel formula that provides superior tank protection from the highly corrosive effects of hot water. This formula (Vitraglas®) is fused to the steel surface by firing at a temperature of over 1600°F (871°C).
- **Insulation System**—1" (25mm) Non-CFC foam insulation covers the sides and top of the tank, reducing heat loss. This results in less energy consumption, improved efficiencies, and jacket rigidity.
- **Water Connections**—3/4" (19mm) NPT factory-installed true dielectric fittings extend water heater life and simplify water line connections.
- **Factory-Installed Heat Traps**—Design incorporates a flexible disk that reduces heat loss in piping and eliminates the potential for noise generation.
- **Protective Magnesium Anode Rod**—Provides added protection against corrosion for long-term, trouble-free service.
- **Steel Tank**—Heavy gauge steel automatically formed, rolled, and welded.
- **Field Convertible**—Units are shipped from factory standard Three Phase, Non-Simultaneous and can be converted to Single Phase and/or Simultaneous operation in the field.
- **Field Conversion Kits**—Change voltage and kW in the field (see options on following page).
- **T&P Relief Valve Installed**—Side T&P is standard. Optional top T&P location is available and must be specified when ordering.



3 or 5-Year Limited Tank Warranties / 1-Year Limited Warranty on Component Parts.

For more information on warranty, please visit www.bradfordwhite.com

For products installed in USA, Canada, and Puerto Rico. Some states do not allow limitations on warranties. See complete copy of the warranty included with the heater.

MANUFACTURED UNDER ONE OR MORE OF THE FOLLOWING U.S. PATENTS: 5,682,666; 7,634,976; 5,660,165; 5,954,492; 6,056,542; 6,935,280; 5,372,185; 5,485,879; 5,574,822; 7,971,560; 7,992,526; 6,684,821; 7,334,419; 7,866,168; 7,270,087; 7,007,748; 5,596,952; 6,142,216; 7,699,026; 5,341,770; 7,337,517; 7,665,211; 7,665,210; 7,063,132; 7,063,133; 7,559,293; 7,900,589; 5,943,984; 8,082,888; 5,988,117; 7,621,238; 7,650,859; 5,761,379; 7,409,925; 5,277,171; 8,146,772; 7,458,341; 2,262,174. OTHER U.S. AND FOREIGN PATENT APPLICATIONS PENDING. CURRENT CANADIAN PATENTS: 2,314,845; 2,504,824; 2,108,186; 2,143,031; 2,409,271; 2,548,958; 2,112,515; 2,476,685; 2,239,007; 2,092,105; 2,107,012. Vitraglas® and Hydrojet® are registered trademarks of Bradford White® Corporation.

Commercial Electric Water Heater

ElectriFLEX LD™ Lowboy Electric Models

Meet or exceed ASHRAE 90.1b (current standard) C.E.C. Listed


Model Number	Nominal Gal. Capacity		Recovery at 100°F Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	F Floor to T&P Conn.††	J C/L of Water Conn.	M Water Conn. NPT	Approx. Shipping Weight
	U.S. Gal.	Imp. Gal.	U.S. GPH	Imp. GPH	in.	in.	in.	in.	in.	in.	lbs.
LE120L3-3†	19	16	18	15	24 3/4	18	25 3/4	19 1/4 / 24 7/8	8	3/4	58
LE130L3-3**	30	25	18	15	30	20	32 3/4	24 / 29 3/8	8	3/4	86
LE140L3-3**	40	33	18	15	32 13/16	22	33 3/4	24 3/8 / 31 3/4	8	3/4	115
LE150L3-3**	47	33	18	15	32 13/16	24	34 1/2	24 1/2 / 31 3/4	8	3/4	140

Model Number	Nominal Liter Capacity	Recovery at 56°C Rise*		A Floor to Top of Heater	B Jacket Dia.	C Floor to Water Conn.	F Floor to T&P Conn. ††	J C/L of Water Conn.	M Water Conn. NPT	Approx. Shipping Weight
		Liters/Hour		mm.	mm.	mm.	mm.	mm.	mm.	kg.
LE120L3-3†	72	68		629	457	654	489 / 632	203	19	26
LE130L3-3**	114	68		762	508	832	610 / 746	203	19	39
LE140L3-3**	151	68		834	559	857	619 / 806	203	19	52
LE150L3-3**	178	68		834	610	876	622 / 806	203	19	64

Specify wattage and voltage when ordering. Use chart below for maximum wattages at certain voltages. **Models include supplied insulation blanket (2" (51mm) thick). Dimensions in charts above do not include blanket thickness. For 5 year models, change suffix "3" to "5". *Based on 4500W/4500W, Non-Simultaneous operation. NSF Kits available when ordering. †Exempt from ASHRAE 90.1b. †† All models feature side or top T&P location and must specify when ordering. "D" dimension listed as side/top.

Wattage Limitations for Non-Simultaneous and Simultaneous Operation	Voltage					Wattage	Recovery ▲ GPH Temperature Rise °F				
	120V	208V	240V	277V	480V		60	80	90	100	120
1500W / 1500W	yes	yes	yes	yes	yes	1500W	10	8	7	6	5
2000W / 2000W	no	yes	yes	yes	yes	2000W	14	10	9	8	7
2500W / 2500W	no	yes	yes	yes	yes	2500W	17	13	11	10	9
3000W / 3000W	no	yes	yes	yes	yes	3000W	21	15	14	12	10
3500W / 3500W	no	yes	yes	no	no	3500W	24	18	16	14	12
4000W / 4000W	no	yes	yes	yes	yes	4000W	28	21	18	16	14
4500W / 4500W	no	yes	yes	yes	yes	4500W	31	23	21	18	15
5000W / 5000W	no	yes	yes	yes	yes	5000W	34	26	23	21	17
5500W / 5500W	no	no	yes	no	no	5500W	38	29	25	23	19
6000W / 6000W	no	no	no	yes	yes	6000W	41	31	28	25	21

▲ (GPH based on Non-Simultaneous operation, when Simultaneous operation the GPH will approximately double.)



Voltage and Wattage Conversion Kits

Simultaneous and Non-Simultaneous Wattage	Voltage					
	120V	208V	240V	277V	380V	480V
1500W / 1500W	265-46409-01	265-46409-05	265-46409-13	265-46409-16	265-46409-24	265-46409-32
2000W / 2000W	N/A	265-46409-06	265-46409-05	265-46409-17	265-46409-43	265-46409-33
2500W / 2500W	N/A	265-46409-07	265-46409-06	265-46409-18	265-46409-25	265-46409-34
3000W / 3000W	N/A	265-46409-08	265-46409-14	265-46409-19	265-46409-26	265-46409-35
3500W / 3500W	N/A	265-46409-09	265-46409-07	N/A	265-46409-27	N/A
4000W / 4000W	N/A	265-46409-10	265-46409-08	265-46409-20	265-46409-29	265-46409-36
4500W / 4500W	N/A	265-46409-11	265-46409-09	265-46409-21	265-46409-30	265-46409-37
5000W / 5000W	N/A	265-46409-12	265-46409-15	265-46409-22	265-46409-31	265-46409-38
5500W / 5500W	N/A	N/A	265-46409-10	265-46409-40**	265-46409-44	265-46409-42**
6000W / 6000W	N/A	N/A	N/A	265-46409-23	265-46409-45	265-46409-39


Note: Above chart can be used to determine maximum wattage at certain voltages. **INCOLOY® element only.

Each kit will include two replacement elements, two gaskets, a rating plate overlay and one set of instructions. For water heaters with only one element, please retain the extra element and gasket as a service part.

General:

All models are exempt from NAECA requirements. All models ETL listed. These heaters are wired inter-locking (Non-Simultaneous, Three Phase) 240V with two 4500W elements, unless otherwise specified. All water connections are 3/4" NPT (19mm). All electrical connections are 3/4" (19mm). All models certified at 300 PSI test pressure (2068 kPa) and 150 PSI working pressure (1034 kPa.)

Dimensions and specifications subject to change without notice in accordance with our policy of continuous product improvement.

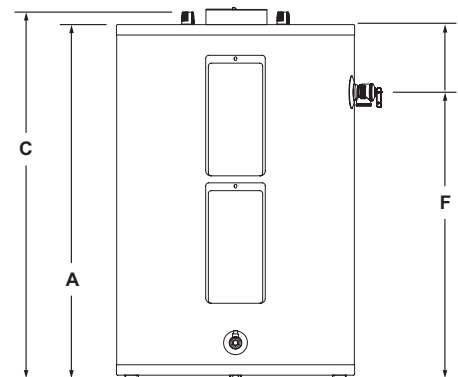

— BRADFORD WHITE IS —



For field service, contact your professional installer or local Bradford White sales representative.

Sales 800-523-2931 ■ Fax 215-641-1612

Technical Support 800-334-3393 ■ Email techserv@bradfordwhite.com

Warranty 800-531-2111 ■ Email warranty@bradfordwhite.com

International: Telephone 1-215-641-9400 ■ Email international@bradfordwhite.com / www.bradfordwhite.com

Built to be the Best™